


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

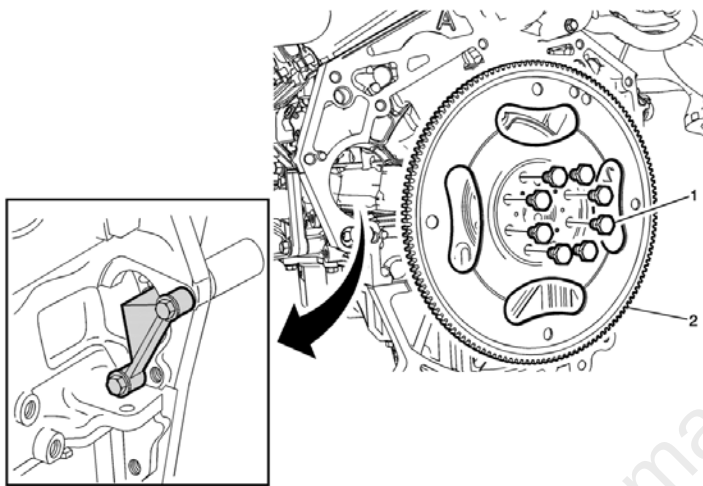

Automatic Transmission Flex Plate Replacement

Callout

Component Name

Procedure

Remove the transmission. Refer to Transmission Replacement.

Flexplate Fastener (Qty, 8)

Caution: Refer to Fastener Caution.

Procedure

1. Install the *EN 46106* tool through the starter mounting hole to secure crankshaft.
2. Remove the engine flexplate bolts and discard.
3. New bolts must be used whenever removing the flexplate.

Tighten

1

- 30 Y (22 lb ft)
- Tighten an additional 45 degrees using the *EN 45059* meter

Special Tools

- *EN 46106* Flywheel Holding Tool
- *EN 45059* Torque Angle Sensor Kit

For equivalent regional tools. refer to Special Tools

2

Flexplate