


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:


Removal Procedure

1. Raise and support the vehicle. Refer to Lifting and Jacking the Vehicle.

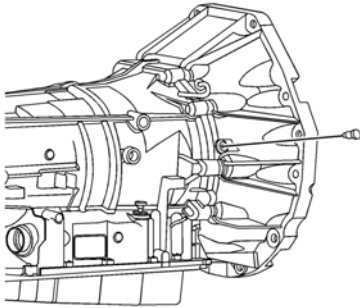

2. Clean the surrounding area of the oil pressure test plug.
3. Remove the oil pressure test plug.

Installation Procedure

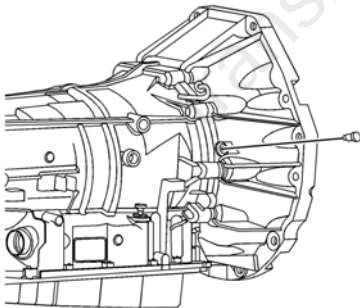

Caution: Refer to Fastener Caution.

1. Install the oil pressure test plug and tighten to **11 Y (97 lb in)**.
2. Check the transmission fluid level (fill if necessary). Refer to Transmission Fluid Level and Condition Check.
3. Lower the vehicle.