


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:


[Removal Procedure](#)

1. Raise and support the vehicle. Refer to Lifting and Jacking the Vehicle.
2. Remove the rear shield, if equipped. Refer to Engine Protection Shield Replacement.
3. Support the front differential with a transmission jack stand.

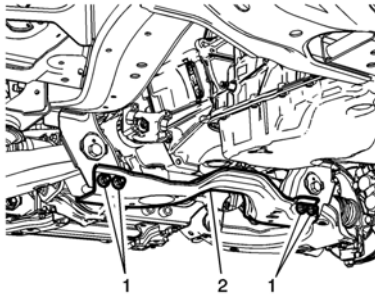

4. Remove the 4 bolts and nuts (1) from the frame.
5. Remove the front crossmember (2).

[Installation Procedure](#)

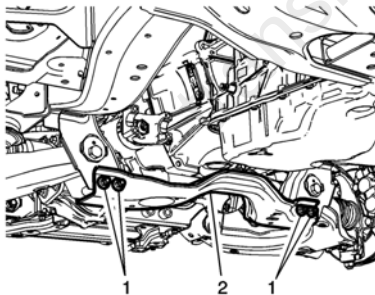

1. Install the front crossmember (2).

Caution: Refer to Fastener Caution.

2. Install 4 bolts in the frame and tighten to **56 Y (41 lb ft)**.
3. Install the rear shield, if equipped. Refer to Engine Protection Shield Replacement.
4. Remove the supports and lower the vehicle.