


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:


[Removal Procedure](#)

1. Raise the vehicle. Refer to Lifting and Jacking the Vehicle.
2. Remove the electrical connector from the speed sensor.

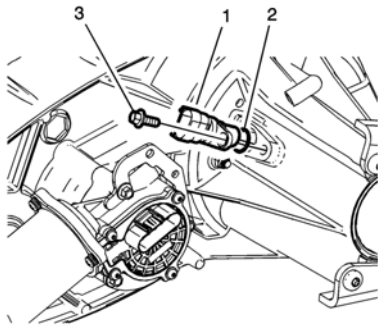

3. Remove the speed sensor (1) and the O-ring (2) from the transfer case.

[Installation Procedure](#)

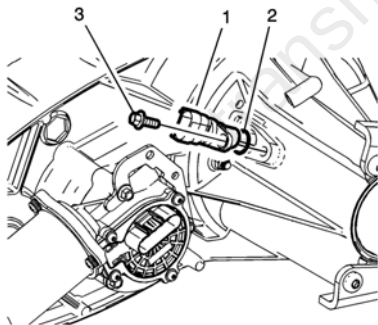

Caution: Refer to Fastener Caution.

1. Install the new speed sensor (1) into the transfer case with a new O-ring seal (2). Tighten the speed sensor to **12 Y (106 lb in)**.
2. Install the electrical connector to the speed sensor.
3. Lower the vehicle. Refer to Lifting and Jacking the Vehicle.