


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:


[Removal Procedure](#)

1. Raise and support the vehicle. Refer to Lifting and Jacking the Vehicle.
2. Remove the electrical connector from the speed sensor.

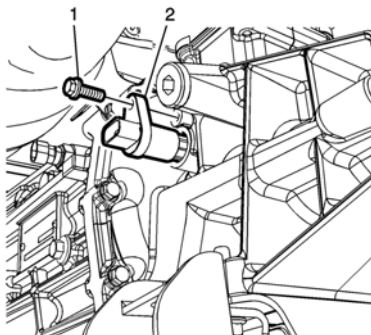

3. Remove the speed sensor retaining fastener (1).
4. Remove the speed sensor (2) from the transmission case.

[Installation Procedure](#)

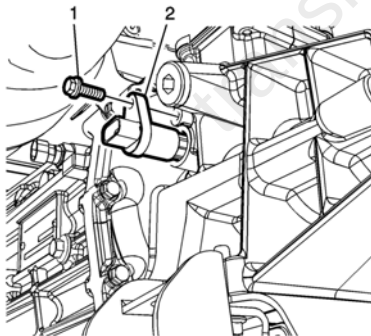

Caution: Refer to Fastener Caution.

1. Install the new speed sensor (2) into the transmission case. Tighten the speed sensor fastener to **12 Y (106 lb in)**.
2. Install the electrical connector to the speed sensor.
3. Lower the vehicle. Refer to Lifting and Jacking the Vehicle.