PUBLISHED: 19-MAR-2017
2017.0 DISCOVERY (LR), 307-02

TRANSMISSION/TRANSAXLE COOLING - VEHICLES WITH: 8HP45 8-SPEED AUTOMATIC TRANSMISSION AWD

TRANSMISSION FLUID COOLER - V6 S/C 3.0L PETROL (G1509726)

REMOVAL AND INSTALLATION

REMOVAL

WARNING:

Fluid loss is unavoidable, use absorbent cloth or a container to collect the fluid.

CAUTION:

Before disconnecting any components, make sure the area is clean and free from foreign material. When disconnected all openings must be sealed.

NOTE:

Removal steps in this procedure may contain installation details.

1.

WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


transmissionmanuals.com

2. Partially drain the cooling system.
Refer to: Cooling System Partial Draining and Vacuum Filling (303-03 Engine Cooling - V6 S/C 3.0L Petrol, General Procedures).

3.

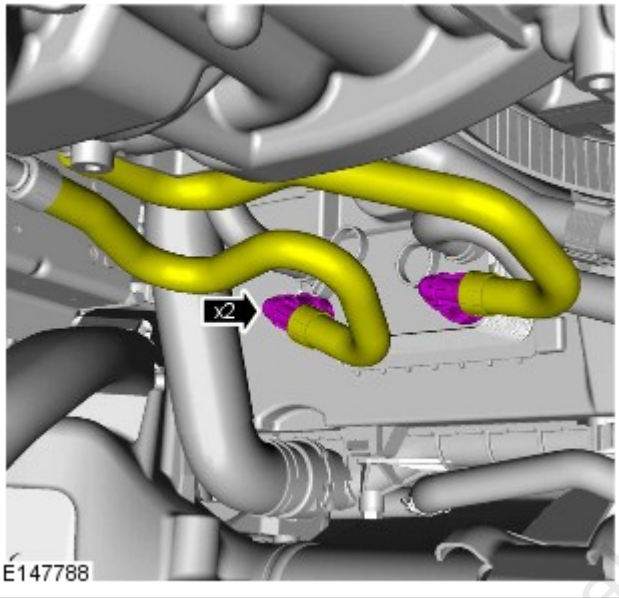


4.

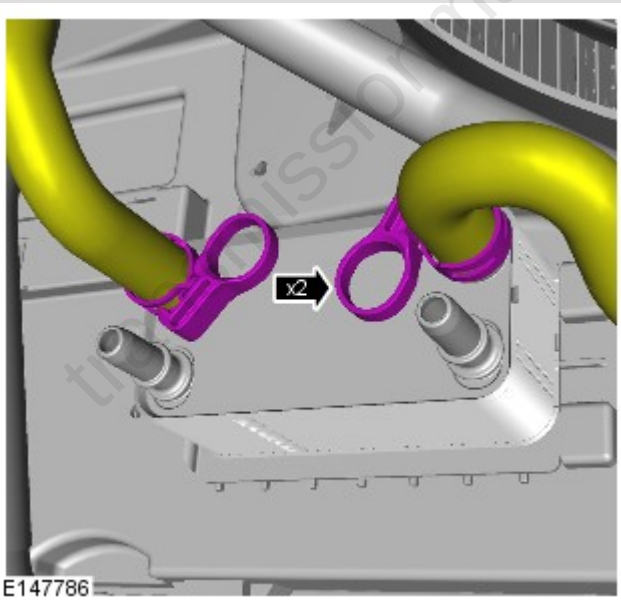

transmissionmanuals.com

5.

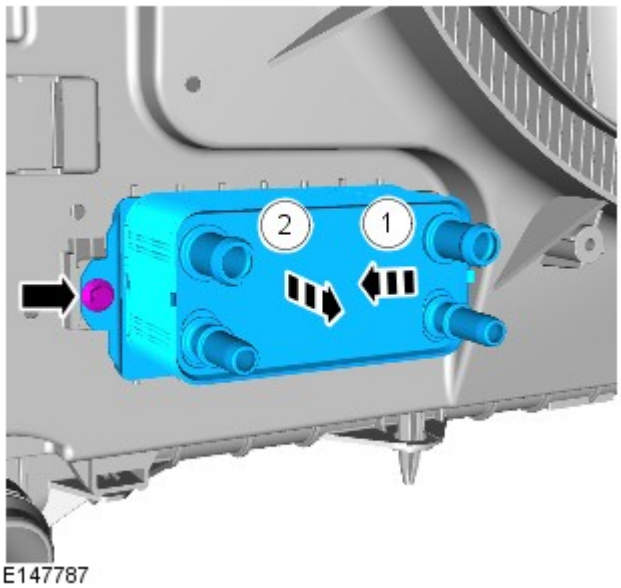

Torque: **7 Nm**

INSTALLATION

1. To install, reverse the removal procedure.

2. Check and top up the transmission fluid.
Refer to: Transmission Fluid Level Check (307-01 Automatic Transmission /Transaxle - Vehicles With: 8HP70 8-Speed Automatic Transmission AWD, General Procedures).

3. Vacuum fill the cooling system.
Refer to: Cooling System Partial Draining and Vacuum Filling (303-03 Engine Cooling - V6 S/C 3.0L Petrol, General Procedures).

transmissionmanuals.com